

Standard Indoor Locker System

SMARTECH Standard Indoor Locker Systems are designed and engineered for multiple package management applications that facilitate a seamless and convenient package delivery and return process, from Click-and-Collect, to university campuses and residential properties.


SMARTECH's Smart Parcel Lockers make package management simple, freeing up time and space for more efficient delivery, collection, and return process.



Locker system specifications

- 18-gauge double-reinforced cold-rolled steel construction
- Operational conditions: temperature +5° to +35° C - humidity up to 80% non-condensing
- Control towers feature an industrial-grade indoor touchscreen, a camera for photo capture, a keypad, a scanner supporting 1D and 2D barcode reading, and speakers
- Each door features smart package sensors to detect packages and other items
- Keypad and touchscreen are located within an accessible range. Users with accessibility requirements can request items be delivered to lower-level lockers
- Locker system is anchored on the wall or on the ground depending on setup and location
- Each tower is bolted and secured together
- Lockers are RCM marked
- Lockers are RoHS and REACH compliant

Colors


-  Traffic White (RAL 9016)
- Custom wraps available



www.smartech-aust.com | ebusiness@smartech-aust.com | 1-800-422-349

Standard Indoor Locker System

Towers specifications

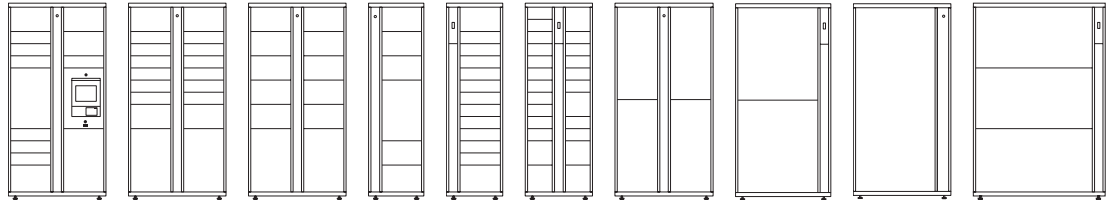

Total Doors (internal size in mm W x D x H) / (Max weight in kg)	D13 control tower	D18	D12	S6	S13	M23	D4	D2	D1	OS-3
Small (345 x 586 x 107) / (15)	7	12			11					
Medium (345 x 586 x 235) / (15)	4	4	10	5	2					
Large (345 x 586 x 618) / (20)	2	2	2	1						
X-Large (345 x 586 x 936) / (20)							4			
H-Small (187 x 586 x 107) / (15)						17				
H-Medium (187 x 586 x 235) / (15)						6				
Jumbo (772 x 560 x 930) / (bottom door: 100 / top door: 50)								2		
Ultra (772 x 560 x 1888) / (100)									1	
OS-3 (1140 x 569 x 609) / (100)										3
Weight (kg)	180	185	170	92	134	176	140	131	130	190

Tower measurements (in mm W x D x H)

D13, D18, D12, D4, D2, D1	1004 x 610 x 2054~2074*
S6, S13	572 x 610 x 2054~2074*
M23	688 x 610 x 2054~2074*
OS-3	1365 x 610 x 2025~2045*

(*) Includes slight adjustments to tower feet for balancing and levelling purposes.

www.smartech-aust.com | ebusiness@smartech-aust.com | 1-800-422-349