

# Standard Outdoor Locker System

Smart parcel locker weatherproof outdoor locker systems are designed and engineered to withstand the elements in multiple package management applications that facilitate a seamless and convenient package delivery and return process – from Click-and-Collect, to university campuses and commercial, residential properties.

SMARTECH's Parcel Lockers make package management simple, freeing up time and space for more efficient delivery, collection, and return process.



## Locker system specifications

- 18-gauge double-reinforced cold-rolled steel construction
- Operational conditions: temperature -25° to +50° C - humidity up to 100% non-condensing
- Rain, salt, and wind (category 3 cyclone) resistant
- Control towers feature an industrial-grade touchscreen, a camera for photo capture, a keypad, a scanner supporting 1D and 2D barcode reading, and speakers
- Camera and touchscreen are optimised for full functionality in bright sun, heat and cold conditions
- Kiosk and screen are temperature controlled (air conditioning and heat) for operation in extreme conditions
- Standard awnings provide users additional protection from outdoor elements and come with built-in lights. Short awnings are available as an option for D series towers only
- Each door features smart package sensors to detect packages and other items
- Keypad and touchscreen are located within an accessible range. Users with accessibility requirements can request items be delivered to lower-level lockers
- Lockers are RCM marked  
Lockers are RoHS and REACH compliant

## Colours

- Stone Grey (RAL7030)


Custom wraps available



[www.smartech-aust.com](http://www.smartech-aust.com) | [ebusiness@smartech-aust.com](mailto:ebusiness@smartech-aust.com) | 1-800-422-349

# Standard Outdoor Locker System

Towers specifications

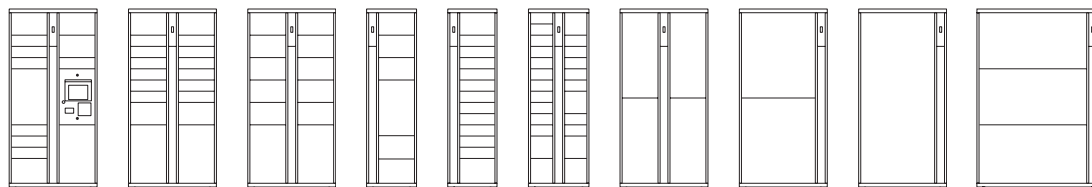

| <b>Total Doors</b><br>(internal size in mm<br>W x D x H) / (Max weight in kg)        | <b>D13</b><br>control<br>tower | <b>D18</b> | <b>D12</b> | <b>S6</b> | <b>S13</b> | <b>M23</b> | <b>D4</b> | <b>D2</b> | <b>D1</b> | <b>OS-3</b> |
|--|--------------------------------|------------|------------|-----------|------------|------------|-----------|-----------|-----------|-------------|
| <b>Small</b><br>(345 x 586 x 107) / (15)   | 7                              | 12         |            |           | 11         |            |           |           |           |             |
| <b>Medium</b><br>(345 x 586 x 235) / (15)  | 4                              | 4          | 10         | 5         | 2          |            |           |           |           |             |
| <b>Large</b><br>(345 x 586 x 618) / (20)   | 2                              | 2          | 2          | 1         |            |            |           |           |           |             |
| <b>X-Large</b><br>(345 x 586 x 936) / (20)   |                                |            |            |           |            |            | 4         |           |           |             |
| <b>H-Small</b><br>(187 x 586 x 107) / (15)   |                                |            |            |           |            | 17         |           |           |           |             |
| <b>H-Medium</b><br>(187 x 586 x 235) / (15)  |                                |            |            |           |            | 6          |           |           |           |             |
| <b>XX-Large</b><br>(772 x 560 x 930)<br>/ (bottom locker: 100 /<br>upper locker: 50) |                                |            |            |           |            |            |           | 2         |           |             |
| <b>Ultra</b><br>(772 x 560 x 1888) / (100)   |                                |            |            |           |            |            |           |           | 1         |             |
| <b>OS-3</b><br>(1140 x 569 x 609) / (100)  |                                |            |            |           |            |            |           |           |           | 3           |
| Weight with no<br>awning (kg)  | 197                            | 183        | 163        | 92        | 92         | 134        | 139       | 131       | 126       | 190         |
| Weight with standard<br>awning (kg)  | 220                            | 206        | 186        | 105       | 147        | 191        | 162       | 154       | 149       | 220         |
| Weight with short<br>awning (kg)   | 210                            | 196        | 176        | n/a       | n/a        | n/a        | 152       | 144       | 139       | n/a         |

|                                  | Tower measurements in mm<br>without awning (W x D x H)* | Tower measurements in mm<br>with awning (W x D x H)* | Tower measurements in mm<br>with short awning (W x D x H)* |
|----------------------------------|---|--|--|
| <b>D13, D18, D12, D4, D2, D1</b> | 1004 x 610 x 2025~2045                                  | 1004 x 1077 x 2192~2212                              | 1004 x 720 x 2107~2127                                     |
| <b>S6, S13</b>                   | 572 x 610 x 2025~2045                                   | 572 x 1077 x 2192~2212                               | n/a  |
| <b>M23</b>                       | 688 x 610 x 2025~2045                                   | 688 x 1077 x 2192~2212                               | n/a  |
| <b>OS-3</b>                      | 1365 x 610 x 2025~2045                                  | 1365 x 1077 x 2192~2212                              | n/a  |

(\*) Includes slight adjustments to tower feet for balancing and levelling purposes.

[www.smartech-aust.com](http://www.smartech-aust.com) | [ebusiness@smartech-aust.com](mailto:ebusiness@smartech-aust.com) | 1-800-422-349